


1. Insert both sign grips into the base.



2. Tighten the nut onto the bottom of the sign grip to fasten (underneath the base).

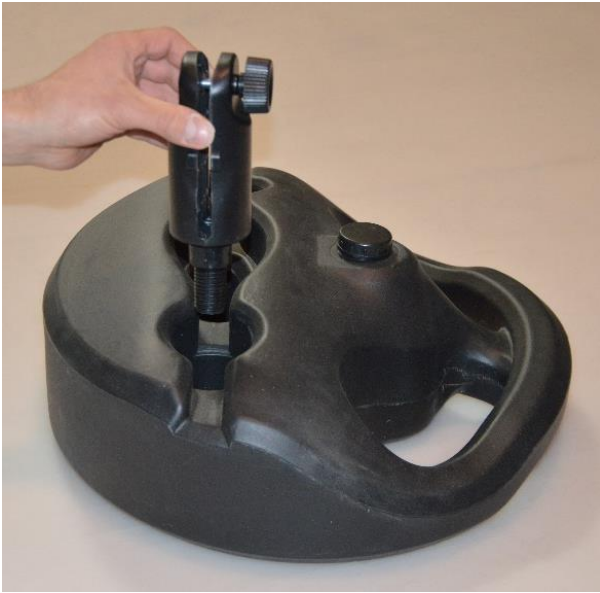

3. Remove the screws from the sign grips.



4. Slide sign into the sign grips, ensuring it is centered, then mark the screw holes of the sign grip on the sign. Use a 3/8" drill bit to make the holes.



5. Unscrew the cap, fill the base with ballast, then replace the cap.

